



Specification For Approval

Part NO. : 840766

Ver: A 0


Product Code : 53-38-0820

Page : 1 / 1

1.CONSTRUCTION

Item		A.Q.L	Description
Conductor	NO./mm	0.18 (+/-0.008)	Stranded bare copper wire
	8 / 0.18 x 20		
Insulation	NO./mm	1.90 (+/-0.13)	Red,White,Black,Brown,Yellow Green,Blue,Gray,PVC insulation
	8 / 1.90		
Shield	Filling	Cotton thread	Cotton thread filling
	Cotton paper		Cotton paper spiral shield
	T0.12 x 144	0.12(+/-0.008);144(+/-2)	Tinned copper braid shield
Jacket	NO./mm	8.80 (+/-0.50)	Matted soft black PVC jacket
	8.80		

2.DESIGN

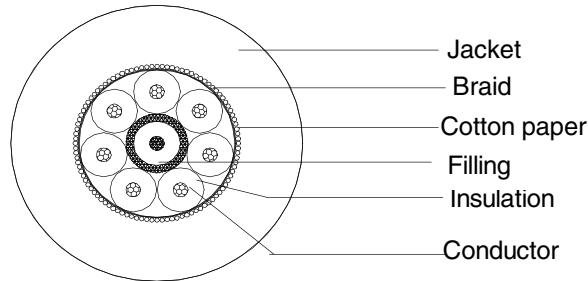

3.CHARACTERISTICS

Item	Description	Standards
1. Cond. Res.	20°C, Conductor DC Resistance	< 4.40 Ω/100M
2. Insul. Res.	20°C, Insulation Resistance	> 500 MΩ.M
3. Rated Tem.	-----	70°C
4. Rated Voltage	-----	30 V

Remark: Please contact us if you have more requirements or specifications subject to change,or else in accordance with the standards.

Prepared: Liu

Approved by :

Client approved :

Date: 2005-8-30